## **NuTone**

## **DESCRIPTION**

- Efficient ventilation and bright light in one easy installation.
- Fan and light operate separately or together.
- Quiet operation with one-piece molded blower wheel and silent backdraft damper.
- Attractive grille styling.
- Plug-in motor and light.
- Uses one (1) 100 watt incandescent bulb (bulb not included).
- Refer to NuTone's catalog for a complete listing of accessories to effectively adapt this Ventilation Fan with Light to your construction requirements.

### **DESIGN FEATURES**

**Air Delivery:** 50 cfm. **Sound Level:** 2.5 Sones.

**Dimensions:** Housing:  $8\frac{1}{4}$ " x 8" x  $5\frac{3}{4}$ ".

Grille: 12" x 103/4".

**Lamp:** One 100W maximum A19

(bulb not included)

Material &

Component Data: Housing: Galvanized steel.

Grille: White polymeric.

**Lens:** Translucent white polymeric. **Reflector:** Galvanized steel (white).

Damper: Polymeric.

**Motor:** Plug-in, permanently lubricated.

**Electrical Rating:** With one (1) 100 watt bulb:

120 VAC, 60 Hz, 1.6 A

Blower Wheel: One-piece polymeric,

4¾" diameter. 4" diameter.

**Duct Size:** 4" diameter.


**Mounting:** Mounting flange provided.

Model 763H: Housing Pack Model 763F: Finish Pack





# Model 763 Ventilation Fan with Light

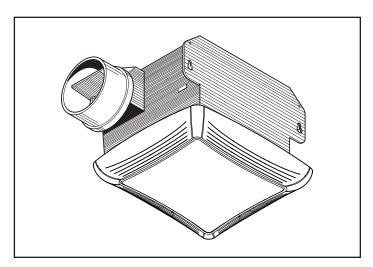

## **INSTALLATION**

- Suitable for use over tub or shower enclosure when installed in a GFCI protected branch circuit.
- · Installation instructions are included with each unit.
- Type IC for use with thermal insulation.
- Not for use with solid state speed controls.
- Not for use in kitchens.

#### **ARCHITECT'S SPECIFICATIONS**

Ventilation Fan with Light shall be NuTone Model 763 as manufactured according to listed specifications. Fan shall ventilate 50 cfm at a sound level of 2.5 Sones. Housing shall be  $8\frac{1}{4}$ " x 8" x  $5\frac{3}{4}$ " and connect to 4" duct.

Broan Hartford, Wisconsin www.nutone.com 888-336-3948

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date

91G 99045282C

## PERFORMANCE RATINGS MODEL 763 FAN / LIGHT

## HVI PERFORMANCE ——

Model	Static Pressure (Ps)	CFM	Sones
763	0.10	50	2.5
703	0.25	29	



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.


## AMPS -

Model	Amps
763	1.6

## **WEIGHT** -

Model	Shipping Weight	
763	6.0 lbs.	



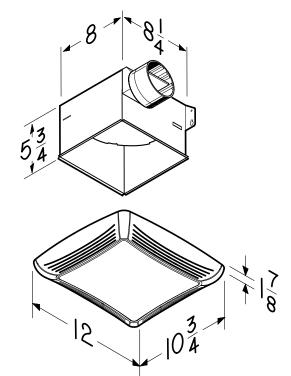

## AIR FLOW PERFORMANCE

