

Features & Benefits

- Internal Driver
- Smooth, Consistent Light
- UL for Safety
- No UV, No Mercury
- Long Life
- High CRI
- Instant on, no delay or warm up time
- Convenient and quick installation
- Utilizes shunted or unshunted G13 sockets
- Compatible with controls and sensors
- Works in cold temperature applications
- 5 Year Warranty
- Made of Glass



Commercial Grade **LED T8 Lamp**
Double End Input



Flex™
Internal Driver LED Lamp

Specification Data

| Model No. | Length | Base type | Lamp Wattage | Input Voltage | CCT | Initial Lumens | CRI | Beam Angle | LPW | Power Factor | THD | Life | DLC |
|---------------------|--------|-----------|--------------|---------------|-------|----------------|-----|------------|-----|--------------|------|-------|-----|
| L48T8/830/12G-ID DE | 48 | G13 | 12 | 120-277 | 3000K | 1800 | 82 | 325 | 150 | 0.9 | <20% | 50000 | Yes |
| L48T8/835/12G-ID DE | 48 | G13 | 12 | 120-277 | 3500K | 1800 | 82 | 325 | 150 | 0.9 | <20% | 50000 | Yes |
| L48T8/840/12G-ID DE | 48 | G13 | 12 | 120-277 | 4000K | 1800 | 82 | 325 | 150 | 0.9 | <20% | 50000 | Yes |
| L48T8/850/12G-ID DE | 48 | G13 | 12 | 120-277 | 5000K | 1800 | 82 | 325 | 150 | 0.9 | <20% | 50000 | Yes |


Ordering Information

EXAMPLE: **L48T8/840/14G-ID DE**

| | | | | | | | | |
|---------------------|--------------------------|----------------------|---------------|--|--------------------|---|-----------------|------------------|
| L | 48 | T8 | 8 | 40 | 14 G | - | ID | DE |
| Manufacturer's Code | Normal Length 48 =48" | Lamp Shape T8 =T8 | CRI 8 =>80 | CCT 50 =5000K 40 =4000K 35 =3500K | Wattage 14G-14W | | Internal Driver | Double End Input |

Wiring diagram



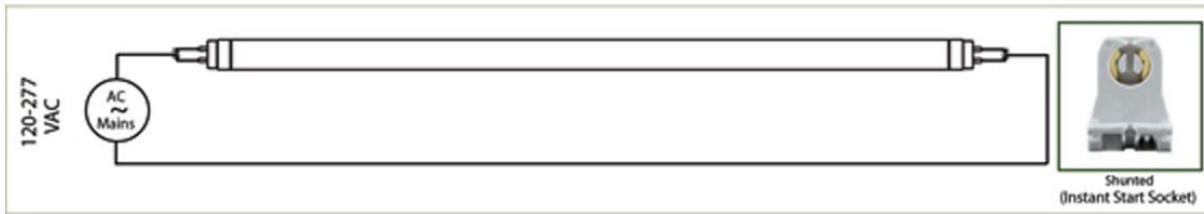

Espen Technology, Inc. | 12257 Florence Avenue | Santa Fe Springs, CA 90670 | Phone: (562) 529-2938 | Fax: (562) 529-2978
Toll-free: (866) 933-7736 | Email: info@espentech.com | www.espentech.com