

Customer No.	Phone	Date
Customer Name	Fax	Sales Rep

**FAX COMPLETED ORDER FORM TO: 1-866-206-5581**

### SLAB DOOR INFORMATION

Part Number

Qty

#### Bolt/Mortise Plate

- 1 x 2-1/4" (standard)
  - Radius Corner (1/4" standard)
  - Square
- Drive In

#### Door Style Hinges

- Hollow Core  3-1/2"
- Solid Core  4"
- Steel  4-1/2"

- Fiberglass
- 6 Panel
- Flush
- Primed
- Other \_\_\_\_\_

#### Radius

- 1/4"
- 5/8" (standard)
- Square

#### Door Thickness

- 1-3/8" (standard)
- 1-3/4"

#### Pre Hung


- 4-9/16" (standard jam)
- Other \_\_\_\_\_

#### Casing


- Clam
- Colonial

Comments \_\_\_\_\_

Indicate Hinge, Lockset and Deadbolt Locations

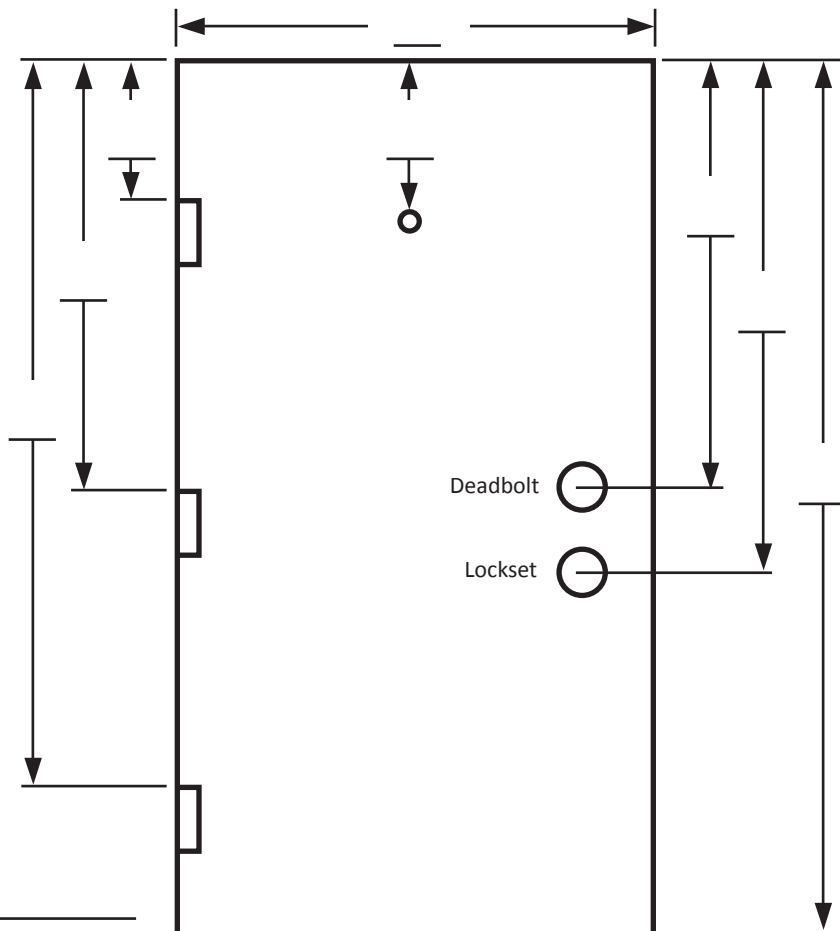

- Handling**
- A** LH Inswing
  - B** RH Inswing
  - C** LH Outswing
  - D** RH Outswing

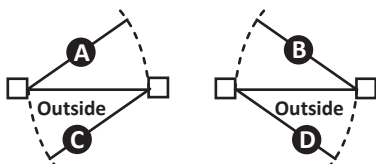

- All measurements must be in inches and taken from the top of the door.
- All lock bores will have a standard 2-1/8" diameter.
- All latch bores will have a standard 1" diameter.
- Provide measurements to the nearest 1/16".
- If door is cut more than 1" in height, it must be rerailed.

Due to the custom requirements and lead times, slab doors are not returnable. Any additional charges for changing sizes or quantities after the initial order is placed will require a new worksheet, and an additional invoice will be created. By signing below, you agree to the terms stated above.

Accepted by: \_\_\_\_\_ Date: \_\_\_\_\_