

# 166012

## FEATURES & SPECIFICATIONS

### INTENDED USE

Suitable for emergency lighting applications such as stairways and hallways.

### CONSTRUCTION

Injection-molded, flame-retardant, high-impact, thermoplastic housing with snap-fit design components with LED lamps for easy installation. Universal J-box pattern. Track and swivel arrangement permits full range of lamp adjustment.

### OPTICS

The typical life of the LED is 10 years. Two 1W LED lamps for emergency light.

### ELECTRICAL

Dual-voltage input 120V or 277V AC. Emergency unit provided with test switch, status indicator and rechargeable battery. Maintenance-free nickel-cadmium battery provides 90 minutes of emergency power.

### LISTINGS

UL Listed. Meets UL 924, NFPA 101, NFPA 70-NEC and OSHA illumination standards. Damp location 32°F to 122°F (0°C to 50°C) listed standard.

### WARRANTY

2-year limited warranty. Complete warranty terms located at

All life safety equipment, including emergency lighting for path of egress must be maintained, serviced, and tested in accordance with all National Fire Protection Association (NFPA) and local codes. Failure to perform the required maintenance, service, or testing could jeopardize the safety of occupants and will void all warranties.


NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25°C.

Specifications subject to change without notice.



LED Lamps

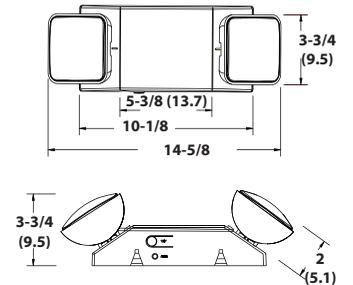

Weight: 4 lbs. (1.82 kgs.).

All dimensions are inches (centimeters) unless otherwise indicated.

### ORDERING INFORMATION

All configurations of this product are considered "standard" and have short lead times.

Catalog Number	Description	Supply Voltage	Input Wattage <sup>1</sup>	Standard Pallet Qty.	Carton Qty.	
166012	7	Emergency lighting unit	120/277	1.8	324	12